


Assembly Manual

Azure

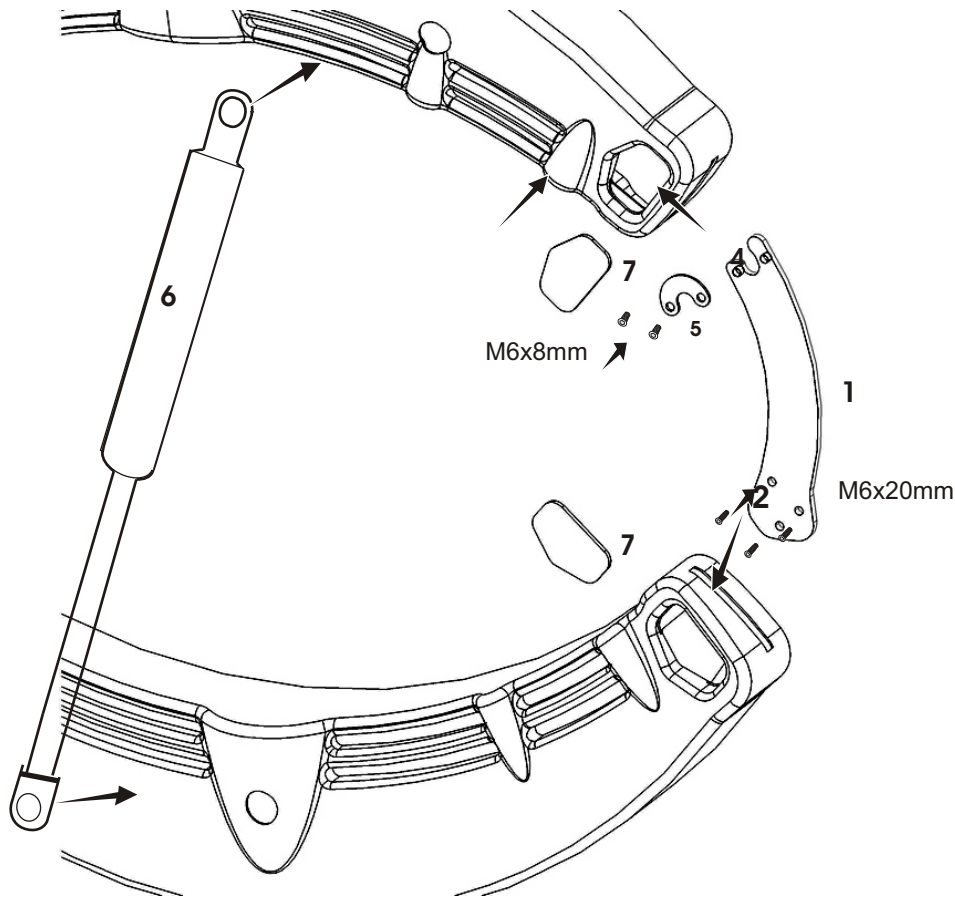

1. Insert (1) Combi-Plate through the slot on each side of the Bench and attach using (3) of the large Allen Head Bolts and the T-Handle Insertion tool as shown on the Figure 1 and 2.
2. Carefully lift the Canopy onto the Combi-Plates by inserting the hooked end of the plate into the slot on the back of each side of the canopy and onto the bushing. When done properly the canopy will now sit on the bushing and it can be carefully moved to the closed position. NOTE- THIS NEEDS TO BE DONE BY TWO PEOPLE SO THE CANOPY IS GENTLY LOWERED ONTO THE BUSHINGS OR DAMAGE CAN OCCUR TO THE CANOPY.
3. Attach (1) Locking Plate on each of the (2) Combi-Arm through the cutout on the end cap and into the threaded holes provided using (2) of the short Allen Head Bolts. This plate saddles over the bushing and locks the canopy onto the bed. NOTE DO NOT MOVE CANOPY UNTIL THE LOCKING PLATES ARE INSTALLED OR THE CANOPY MAY COME OFF THE COMBI-ARM AND DAMAGE THE UNIT.
4. Pull the (2) Security knobs out of each of the (2)Gashocks and set them aside.
5. Install the shaft side (thin) of (1) Gas-shock to onto the Ball-nut protruding from one side of the Bench. Repeat this step for the opposite side. Replace (1) security knob into each of the (2) ends installed on the Ball-nut to lock it in place.
6. Have someone raise the canopy for you while aligning the top end (Thick) of (1) Gas-shock onto the Ball-nut protruding from each side of the Canopy. Repeat this step for the opposite side. Replace (1) security knob into each of the (2) ends installed on the Ball-nut to lock it in place.
7. Raise and lower the canopy to insure it moves freely and stops in any position. Then finish tighten and recheck all bolts. NOTE IN TIME AND DURING USE BOLTS MAY LOOSEN SO CHECK AND RE-TIGHTEN AS NECESSARY AS A PART OF NORMAL MAINTENANCE.
8. Insert plastic cover in each off the end cap access pockets.
9. Plug the canopy power cord into the mating bench power cord.
10. Plug the power cord to a properly rated receptacle.
11. Turn the timer knob on the unit to the desired duration to operate the unit. REVIEW THE USER MANUAL FOR PROPER OPERATION AND USE OF THIS TANNING BED.